



## iTN8800 – Intelligent Service Aggregation Device

Raisecom iTN8800 service aggregation device is optimized for multiservice adaption, aggregation and routing, especially onto a modern Ethernet and IP/MPLS infrastructure. It is well suited for the cost-effective delivery of residential, business and mobile services. The iTN8800 features industry-leading switching capacity and port density in a compact 2RU form factor. It supports up to 12x10GbE, 40xGbE, 96xE1 ports with dual control and dual power modules. The iTN8800 provides a comprehensive and scalable feature set of Layer 2 VPN (L2VPN), Layer 3 VPN (L3VPN) and PWE3 services with routing technologies, MPLS technologies, TDMoP technologies and clock synchronization technologies optimized for service providers. The iTN8800 also supports both MPLS-TP and IP MPLS stacks, provides comprehensive end-to-end OAM/SLA/Protection features.



iTN8800

### Highlights >>

<b>IP MPLS</b>	Supports multiple routing functions, such as OSPF, BGP, and MP-BGP, and support LDP and *RSVP-TE to dynamically establish MPLS tunnels and PW services.
<b>Multiservice</b>	Supports multiple service type, including L2VPN, L3VPN, PWE3 service. Up to 96xE1 interfaces for connecting legacy TDM network.
<b>Committed resiliency &amp; Protection</b>	Supports link-based, protocol-based, and service-based multi-layer protection functions, such as LAG/LACP, primary/secondary link aggregation, G.8031, G.8032, G.8131, *TE Hot-standby, *TE FRR, PW protection, and LSP protection with sub 50ms switching time.
<b>Hardware-based SLA</b>	Hardware-based BFD, MPLS-TP OAM and Y.1731 features supply multi-layer continuity check, frame delay, frame jitter and packet loss measurement mechanism. Includes on-board, line-rate RFC2544 testing capabilities for end-to-end SLA verification.
<b>Automated Provisioning</b>	Supports auto-discover remote CPE devices to minimize OpEx and accelerate service turn-up with activation testing.
<b>Synchronization for MBH</b>	Compliant with ITU-T G.8261/G.8262 (*SyncE) for network-based synchronization.
<b>High Availability</b>	Supports graceful restart for routing protocol. Dual main control card and dual power module redundancy design.

#### International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District, Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
[www.raisecom.com](http://www.raisecom.com)

#### U.S.A. Headquarters


3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: [ussales@raisecomusa.com](mailto:ussales@raisecomusa.com)

#### Raisecom Technology Co., Ltd.

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice



Application >>

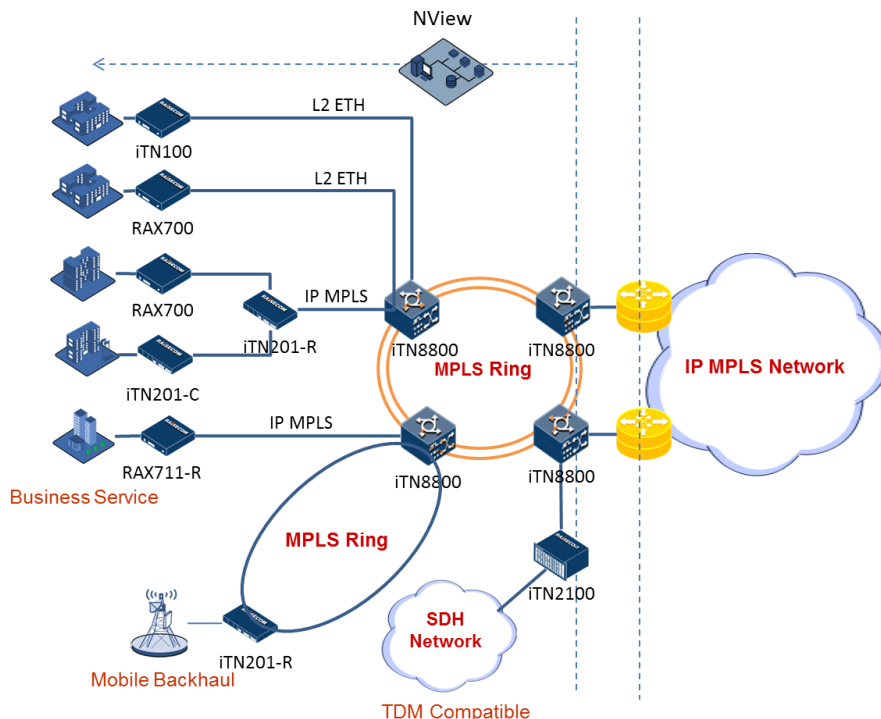

**Products involved**

- Aggregation Unit:  
iTN8800
- Remote Unit:  
RAX700 series  
iTN100 series  
iTN200 series  
iTN2100

Figure.1 Converged fixed and mobile networks offer a wider range of services

**Large Enterprise, Small/Medium Business services Application**

The iTN8800 can work with iTN200/RAX700/iTN100 series together for Large Enterprise, Small/Medium Business services. Its MPLS features allow creating a scalable network with huge capacity and protection mechanism. It is flexible with various different CPEs for Imaging/video distributions, business data, L2VPN, L3VPN, TDM services etc. Meanwhile, such solution can guarantee Carrier-grade end-to-end SLA (hardware-based) performance monitoring for frame delay, jitter and packet loss.

**New Generation Mobile Backhaul Application**

The iTN8800 is easy to create multiple GE or 10GE MPLS rings with iTN201-R to transmit LTE eNodeB service with sync Ethernet frame. To guarantee the huge mobility data application as well as voice, its LSP protection/\*TE Hot-standby/\*TE FRR features conform to switch over within 50ms. Its huge switch capability and routing table will help to converge and schedule largely mobility data to the core IP MPLS network.

**Legacy TDM Network Compatible Application**

The Ethernet service carried in the legacy TDM network can access into the packet switch network cooperate with iTN2100 EOS feature. The iTN2100 can extract the original Ethernet packets form SDH and then ingress into iTN8800. Or the iTN8800 can encapsulate the E1 service into MPLS frames with TDMoP and PWE3 features.

**International Headquarters**

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District, Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
www.raisecom.com

**U.S.A. Headquarters**

3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: ussales@raisecomusa.com

**Raisecom Technology Co., Ltd.**

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice



## Key Features >>

<b>Ethernet service</b>	IEEE 802.1Q VLAN: 4K active VLANs; QinQ
<b>MPLS Service</b>	MPLS VPWS,VPLS, HVPLS, L3VPN, Multi-Segment PW LDP for LSP/PW, MPLS-TP, *RSVP-TE
<b>PWE3</b>	PW payload type: SAToP, CESoPSN PSN type: MPLS Configurable Jitter buffer RTP configuration
<b>Layer 3 Service</b>	IPv4 Stack IPv4 hardware forwarding OSPF for IPv4, BGP for IPv4, MP-BGP, VRRP, Multi-VRF
<b>Switching mode</b>	Store and Forward mode 32Mbit switching buffer Supports Jumbo frames
<b>MAC Address Table</b>	MAC address learning/add/remove/searching Up to 128K MAC addresses(16K default)
<b>Route Table</b>	Up to 128K FIB table
<b>Packet forwarding</b>	MTU: 9600 byte (default: 1500 byte) Storm control on DLF, Multicast and Broadcast packets
<b>Link Aggregation</b>	Up to 64 link aggregation groups, with up to 8 ports in each group Load balance based on MAC, MPLS label and IP address
<b>Link Resilience</b>	PW redundancy PW 1:1 and LSP 1:1 based on ITU-T G.8131 PW dual-home protection *RSVP-TE Hot-standby & *RSVP-TE FRR LAG (static/IEEE 802.3ad LACP) and MC-LAG(Multi-chassis LAG) ITU-T G.8031 ELPS & ITU-T G.8032 ERPS Port based Ethernet local loop detection
<b>IP and MPLS OAM</b>	IPv4 Ping, IPv4 Traceroute LSP Ping/PW Ping/Tunnel Ping/L3VPN Ping LSP Traceroute/PW Traceroute/Tunnel Traceroute/L3VPN Traceroute Supports BFD message is sent per 3.3ms BFD for OSPF/VRRP BFD for PW/Static LSP/LDP LSP/CR-LSP/Tunnel/IP
<b>MPLS-TP OAM</b>	Supports MPLS-TP OAM on PW/LSP/Section based on ITU-T G.8113.1 Supports Check message is sent per 3.3ms Supports Hardware-based Frame Delay and Packet Loss Measurement

### International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District,Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
[www.raisecom.com](http://www.raisecom.com)

### U.S.A. Headquarters

3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: [ussales@raisecomusa.com](mailto:ussales@raisecomusa.com)

### Raisecom Technology Co., Ltd.

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice



Connectivity Check, Non-intrusive Loopback, Link-Trace, Performance Monitor; AIS/RDI/APS/LM/DM/CSF

**Carrier Ethernet OAM** IEEE802.3ah OAM including discovery, link performance, remote loopback, fault detection & performance stats per OAM standards  
OAM Active/Passive mode  
OAM Dying Gasp  
OAM MIB Variable Get function  
OAM Event function

**Carrier Ethernet CFM** Supports IEEE 802.1ag CFM and ITU-T Y.1731 SLA  
Supports Check message is sent per 3.3ms  
Supports Hardware-based Frame Delay and Packet Loss Measurement  
Connectivity Check, Non-intrusive Loopback, Link-Trace, Performance Monitor; ETH-AIS/RDI/LCK/APS/LM/DM/LCK  
Supports IEEE 802.1ag CFM and ITU-T Y.1731 SLA over MPLS PW EFP

**SAT** Supports RFC2544 over MPLS PW EFP

**ACL** Supports MAC/IP/MPLS based ACL and L2~L4 based ACL MAP  
Supports user defined ACL  
MAC based ACL combination with VLAN/CoS/MAC/EtherType  
IP based ACL combination IP/L4 protocol/DSCP/VRF  
MPLS based ACL combination with MPLS Label/MPLS EXP

**QoS** Supports Port/Trunk/VlanIf/Sub-interface mapping  
Supports CoS/DSCP/MPLS EXP mapping  
Supports SP, WRR, DRR, SP+WRR, and SP+DRR scheduling  
Supports port-based/flow-based shaping  
Up to 8 queues per port  
Flow-based statistics/mirroring/rate-limiting/redirecting/VLAN-rewriting  
Rewriting of 802.1p CoS/DSCP/IP Precedence per EVC  
Supports Weighted Random Early Detection, weight 0-15

**MPLS QoS** Supports MPLS Pipe and Uniform mode  
Bandwidth configuration check between PW/LSP/Port  
H-CAR(Hierarchical bandwidth rate-limit) between PW/LSP/Port  
H-QoS(Hierarchical QoS) between PW/LSP/Port

**Rate-Limit** Supports ingress rate-limit and egress rate-limit  
Based on Flow/RFC2697/RFC2698/RFC4115/MEF modes

**LLDP** Discovery remote base on link layer  
Get remote basic information

#### International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District, Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
[www.raisecom.com](http://www.raisecom.com)

#### U.S.A. Headquarters

3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: [ussales@raisecomusa.com](mailto:ussales@raisecomusa.com)

#### Raisecom Technology Co., Ltd.

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice



<b>Mirror</b>	Mirroring per port Separate mirroring configurations for ingress port & egress port & CPU port
<b>Synchronization</b>	*SyncE according to ITU-T G.8261/G.8262, supports SSM-QL
<b>DHCP</b>	Supports DHCP Server with option 60 Supports DHCP Relay with option 82
<b>High Available</b>	Supports system hot standby based on dual main control Supports graceful restart on OSPF and BGP
<b>Statistics</b>	Ingress and egress statistics based on Port/Interface/Rate-Limit/VPWS/VPLS/VRF In-profile and out-profile statistics based on ACL
<b>Auto-Provisioning</b>	Discover and manage remote CPEs as RAX700/iTN100/iTN200 series
<b>Management</b>	CLI/ARP/Telnet/Console/SNMP/SSH/SysLog/Trap/NAT Raisecom NMS FAN/Power/Temperature/CPU/Memory/Card/Module management
<b>Safety Features</b>	Client classification and password protection RADIUS TACACS+ CPU protection based on rate-limit Port Isolation
<b>Time management</b>	Timezone, Time modification Supports SNTP & NTP
<b>DDM</b>	SFP digital diagnostic function

\*Roadmap in 2015 Q3

## Specifications >>

<b>Performance</b>	Switching fabric: 120Gbps
<b>Main Control Card</b>	iTN8800-NXU: Management port: 1 Console (USB) 1 NEG (RJ45) 1 Debug (Reserve) EXT1 (Reserve) EXT2 (Reserve) Clock port: 1 Bits (2MHz/2Mbits) Support in slot1~slot2.
<b>Port Expansion Card</b>	iTN8800-RG8: 8 x GE SFP Support in slot3~slot8, slot7/slot8 only supply 4xGE access. iTN8800-RG2: 2 x 10GE XFP

## Compliances >>

<b>Standards &amp; protocols</b>	IEEE802.3 IEEE802.3z IEEE802.3x Flow Control IEEE802.3ad Link Aggregation IEEE802.1p IEEE802.1Q VLAN IEEE802.1ad QinQ IEEE802.3ah OAM IEEE802.1ag CFM *ITU-T G.8261/G.8262 SyncE ITU-T Y.1731 Services OAM ITU-T G.8031 ELPS ITU-T G.8032 ERPS ITU-T G.8131 MPLS Linear Protection ITU-T G.8113.1 MPLS-TP OAM RFC2544 RFC2328 OSPFv2 RFC4271 BGPv4 RFC4760 MP-BGP
----------------------------------	--

### International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District, Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
www.raisecom.com

### U.S.A. Headquarters

3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: ussales@raisecomusa.com

### Raisecom Technology Co., Ltd.

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice



	Support in slot3~slot8, all supply 2x10GE access.
PWE3 Expansion Card	iTN8800-RE16: 16 x E1 SCSI100 Female iTN8800-RE16-BL: 16 x E1 RJ45 Balance
Power Specs	Dual DC: -48V(-40~-57V) Full load: ≤350W
Us Conditions	Operating temp: 0~45°C (32~113°F) Storage temp: -25~65°C (-13~149°F) Humidity: 10~90% non-condensing
Lightning Proof	1kV
Dimensions	440(W) x 220(D) x 88.1(H) mm <sup>3</sup>
Weight	≤ 9.42Kg

RFC3031 MPLS Architecture  
RFC3985 PWE3  
RFC4664 L2VPN RFC4762 VPLS  
RFC2547 BGP/MPLS VPN  
RFC5036 LDP RFC4447 LDP for PW  
\*RFC3209 RSVP-TE  
RFC5659 Multi-Segment PWE3  
RFC5880 BFD  
RFC5086 CESoPSN RFC4553 SAToP  
RADIUS TACACS+  
SNMPv1/v2c/v3  
EMC Class A  
RoHS compliance  
MEF 9 & MEF 14

## Ordering Information >>

iTN8800-II-DC	2RU chassis, with 2 DC power and 1 Intelligent FAN. The chassis has 2 slots for main control card and 6 slots for interface sub card.
iTN8800-II-NXU	Main control card, providing Console interface and SNMP interface. Dual main control card redundancy design, supporting 1:1 hot backup.
iTN8800-RG8	GE Interface card, providing 8 SFP Ethernet optical/electrical interfaces, and supporting GE, FE.
iTN8800-RX2	10GE interface card, providing 2 10GE XFP Ethernet optical interfaces.
iTN8800-RE16	TDMoP interface card, providing 16 E1 SCSI100 female electrical interfaces.
iTN8800-RE16-BL	TDMoP interface card, providing 16 E1 RJ45 balance electrical interfaces.
RPD1351-S-48S48	Power module, providing -48V DC power.
FANS331	Replacement Intelligent FAN.

### International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,  
Haidian District, Beijing. 100094, China  
Tel: +86 10 8288 3305  
Fax: +86 10 8288 3056  
[www.raisecom.com](http://www.raisecom.com)

### U.S.A. Headquarters

3031 north Rocky point Drive West Harborview  
Building, Suite 100 Tampa Florida. 33607. USA.  
Tel: +1 888 816 4808 ext 201  
Fax: +1 727 547 9124  
Email: [ussales@raisecomusa.com](mailto:ussales@raisecomusa.com)

### Raisecom Technology Co., Ltd.

Copyright@1999-2014  
All rights reserved  
Technical information is subjected to  
change without notice