



ISCOM6810-XC16

The ISCOM6810-XC16 is a small-capacity enhanced XGS-Combo PON cartridge optical access office device launched by Raisecom Technology Co., Ltd. Its power supply and fan adopt modular design, so they are easy to be installed and deployed. It has strong GPON/XG-PON/XGS-PON access capabilities and carrier-grade reliability, supports strong security functions (such as ACL and DoS attack prevention) and flexible QinQ service capabilities, and provides good management, maintenance and monitoring functions.

This product provides rich service features and flexible networking methods to meet the needs of low-density, long-distance optical access.

ISCOM6810-XC16-AC/D



ISCOM6810-XC16-AC_DC



ISCOM6810-XC16-DC/D



Highlights >>

High integrity and flexible networking

- The 1U height and modular design facilitates the installation and replacement of components.
- Support sixteen GPON, XG(S)-Combo PON interfaces. Support two 100GE optical interfaces and four 10GE optical interfaces; Support wire-speed forwarding.
- Provide users with access to broadband, voice, IPTV and other services, thus meeting access applications in multiple scenarios for carriers, broadcasting network, CPN, and other industries.
- The remote area can be covered by OLT cascading. The OLTs works at the edge to form a chain connection, which is suitable for long-distance broadband access scenarios and saves backbone fiber resources.
- Broadcast, multicast, and unicast transmission

Carrier-grade reliability

- Support 1+1 power supply protection
- Support the Ethernet ring network with the switching time of 50ms.

Rich features

- Powerful VLAN processing capabilities, including selective QinQ, VLAN mapping, and VLAN aggregation
- Complete QoS functions, including DBA, superior control, multiple traffic classification mechanisms, multi-queue scheduling, and other technologies, to meet the different QoS requirements of VoIP, video, and Internet services
- Complete ACL functions, including L2, L3, L4 and user-defined ACLs
- IGMP/MLD Snooping, Proxy, MVR, and controllable Multicast
- IPv4/IPv6 dual-stack and IPv4/IPv6 dynamic routing protocols
- STP/MSTP, link aggregation, DHCP, interface isolation, and other common functions
- L2CP protocol for transparent data transmission

International Headquarters

Raisecom Building, East-11, No.10 Xibeiwang East Road,
Haidian District, Beijing, P.R.China, 100193
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

North American Headquarters, Raisecom Inc.

6380 N Eldridge Parkway Houston Texas 77041 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright@1999-2024
All rights reserved
Technical information is subjected to
change without notice



Green and energy-saving design

- The device is designed with low energy consumption, and the power consumption of the entire device is less than 170 W.
- The fan can be intelligently adjusted according to the temperature, improving the fan life, reducing wind noise, and implementing energy saving.

Application >>

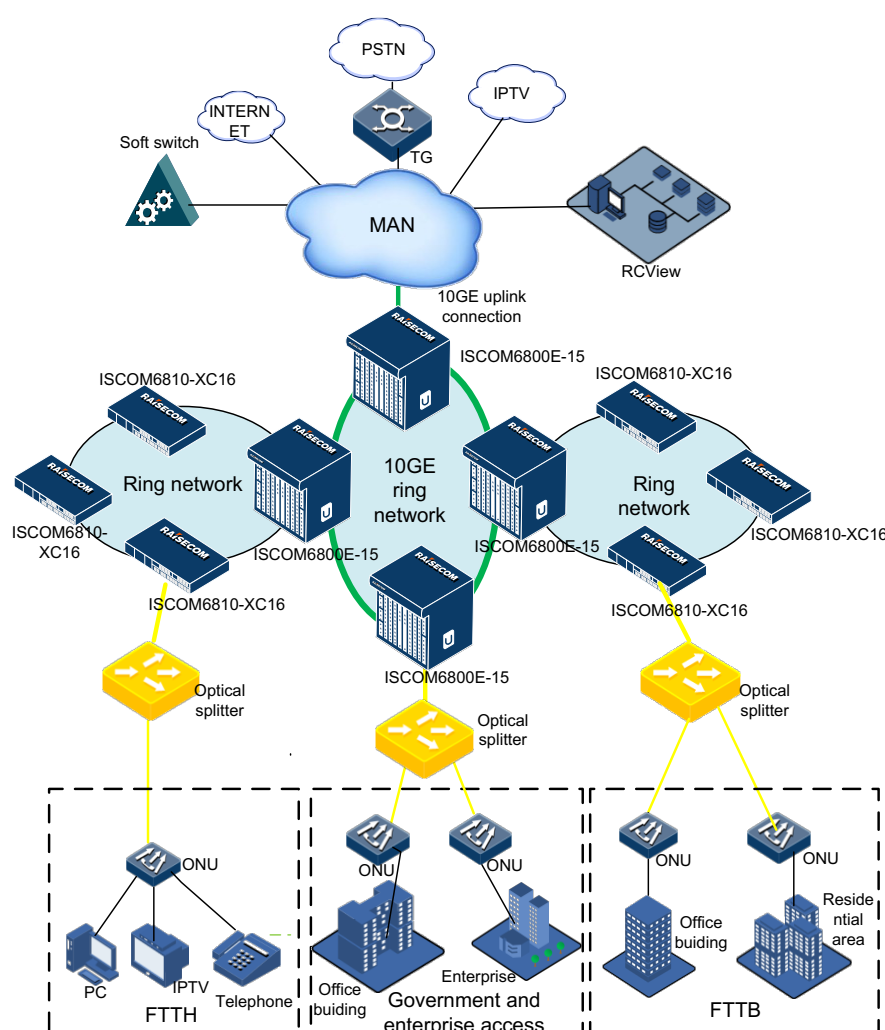


Figure 1 Ring network with the ISCOM6810-XC16 and ISCOM6800E-15

In this application scenario, the ISCOM6810-XC16 devices can form an Ethernet ring network with the Raisecom ISCOM6800E-15 to provide customers with reliable access services. At the same time, the ISCOM6800E-15 devices at each regional aggregation point can form a 10G Ethernet ring network (the switching time is less than 50ms), which not only provides the function of ring network protection, but also saves backbone optical fiber resources and meets customers' needs for high-bandwidth transmission.

International Headquarters

Raisecom Building, East-11, No.10 Xibeiwang East Road,
Haidian District, Beijing, P.R.China, 100193
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

North American Headquarters, Raisecom Inc.

6380 N Eldridge Parkway Houston Texas 77041 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright@1999-2024
All rights reserved
Technical information is subjected to
change without notice



The ISCOM6810-XC16 is suitable for carriers and ISP customers in low-density user areas, such as villas, suburbs, towns, and rural areas, and provides various typical services for accessing broadband, IPTV, leased line, and video monitoring.

Key features >>

MAC	● Support automatically learning and aging MAC addresses. ● Support static, dynamic, and blackhole MAC addresses. ● Support filtering packets with specified source MAC addresses. ● Support MAC address limit based on interface and VLAN. ● 32K mac address table
VLAN	● Support 4K VLANs. ● Support basic QinQ. ● Support Selective QinQ. ● Support VLAN mapping.
Routing	● Support RIP, OSPF, ISIS, BGP, and other IPv4 dynamic routing protocols. ● Support RIPng, OSPFv3, ISISv6, BGP4+, and other IPv6 dynamic routing protocols.
Multicast	● Support static multicast. ● Support IGMP v1/v2/v3, IGMP v1/v2/v3 Snooping, and MLD Snooping. ● Support MVR (inter-VLAN copy) and MVR Proxy. ● Support controllable multicast. ● Support multicast policies and multicast QoS.
QOS&ACL	● Support Ingress/Egress ACL. ● Support priority mapping. Each interface supports 8 queues. ● Support combined traffic classification based on L2/L3/L4 protocols and 802.1p priority. ● Support ACL, CAR, Remark, Schedule, and other actions. ● Support SP, WRR, DRR, SP+WRR, and SP+DRR queue scheduling modes. ● Support traffic shaping.
Link aggregation	● Support six load balancing modes based on MAC address or/and IP address. ● Support LACP.
Security	● Support AAA/RADIUS. ● Support TACACS+. Support local authentication. ● Support 802.1x authentication. ● Support MAC address authentication.

International Headquarters

Raisecom Building, East-11, No.10 Xibeiwang East Road,
Haidian District, Beijing, P.R.China, 100193
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

North American Headquarters, Raisecom Inc.

6380 N Eldridge Parkway Houston Texas 77041 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright@1999-2024
All rights reserved
Technical information is subjected to
change without notice



- Support SSHv2, SFTP, and HTTPS.
- Support hierarchical command protection to prevent unauthorized users from accessing illegally and to configure different privileges for users of different levels.
- Support storm control based on interface and VLAN.
- Support the whitelist, port security MAC, and MAC address limit.
- Support IP Source Guard. Support DoS attack prevention, ARP attack prevention, TCP SYN Flood attack prevention, UDP Flood attack prevention, broadcast storm attack prevention, and massive traffic attack prevention.

Loop guard

- Support STP (IEEE 802.1d), RSTP (IEEE 802.1w), and MSTP (IEEE 802.1s).
- Support BPDU guard, Root guard, and loop guard.
- Support ERPS (G.8032).

IPv6

- IPv6 dual stack
- IPv6 snooping, DHCPv6 Guard, RA Guard, DHCPv6 snooping

Management and maintenance

- Support login from the Console interface.
- Support multiple management and maintenance modes, such as CLI, Telnet, SSH.
- Support SNMP v1/v2c/v3.
- Support the RCVIEW NMS.
- Support the uniform user management, and group-based, domain-based, and time-based authorization.
- Support system logs and hierarchical alarms.
- Support RMON.

Specifications >>

Slots	4
Main control uplink card	1 (removable)
Switching capacity	880G
Forwarding rate	Wire-speed forwarding on all interfaces
PON interfaces	16*XG(S) PON Combo interfaces, Class C+/C++ GPON: Downstream 2.488 Gbps and Upstream 1.244 Gbps XGS PON: Downstream 9.953 Gbps and Upstream 9.953 Gbps
PON optical splitting ratio	1:384
Fans	1
Power supply	AC: 110/220 V; voltage range: 100~240 V (50/60 Hz) DC: -48/-60 V; voltage range: -36 to -72 V

Standards and protocols >>

Standards and protocols	Support ITU-T 984/988/987/9807 ETSI EN 300 019-1-1~3 IEC 60068-2 IEC 60721-2-6 IEC 60721-3-1~3 ETSI EN 300 753 NEBS GR-63-CORE ROHS IEC 61000-4-2~6 IEC 61000-4-29 EN 61000-4-2~6 EN 61000-4-29 ETSI EN 300 386 V1.6.1 ETSI ES 201 468 V1.4.1 VCCI V-3 EN 55022 EN 55024 EN 55032 ITU-T K.20 CISPR 22 CISPR 24 ITU-T K.32 ITU-T K.44 FCC part 15 ICES-003 EN 60950-1 EN 60825-1~2 IEC 60825-1~2 IEC 60950-1 UL 60950-1
-------------------------	---

International Headquarters

Raisecom Building, East-11, No.10 Xibeiwang East Road,
Haidian District, Beijing, P.R.China, 100193
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

North American Headquarters, Raisecom Inc.

6380 N Eldridge Parkway Houston Texas 77041 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright@1999-2024
All rights reserved
Technical information is subjected to
change without notice



Dimensions	440mm (Width) × 266 mm (Depth) × 44 mm (Height)
Environment	Operating temperature: -10 to 55°C Operating humidity: 10%–90% RH (non-condensing)
Weight	< 6.5 kg
Maximum power consumption	< 170 W

Ordering information>>

ISCOM6810-XC16-AC/D (A)	1U cartridge XGS-Combo PON device, with centralized management of sixteen GPON&XG-PON&XGS-PON Combo interfaces, two 100GE interfaces(QSFP28 optical interfaces) and four 10GE interfaces (SFP optical interfaces), supporting service switching and aggregation, dual AC power supplies
ISCOM6810-XC16-DC/D (A)	1U cartridge XGS-Combo PON device, with centralized management of sixteen GPON&XG-PON&XGS-PON Combo interfaces, two 100GE interfaces(QSFP28 optical interfaces) and four 10GE interfaces (SFP optical interfaces), supporting service switching and aggregation, dual DC power supplies (-48/-60 V)
ISCOM6810-XC16-AC/DC (A)	1U cartridge XGS-Combo PON device, with centralized management of sixteen GPON&XG-PON&XGS-PON Combo interfaces, two 100GE interfaces(QSFP28 optical interfaces) and four 10GE interfaces (SFP optical interfaces), supporting service switching and aggregation, single AC power supply + single DC power supply (-48/-60 V)